



महावीर वात्सल्य अस्पताल

(महावीर वात्सल्य अस्पताल)

प्ल. सी. डी घाट, पटना - 800 001

सदाकल आश्रम से पूरब, पटना - 800 001, दूरभाष : 9473387537

पत्रांक : MVA-38

दिनांक 29.01.2026

Quotation Invitation

Quotations are invited in sealed envelope by 7th February 2026 for proposed Patient attendant complex toilet bathroom at the Mahavir Vatsalya Aspatal. As detail list has given below. The proposal should as per hospital norms and additional details if any Required.

S. No	Particulars work name	Type of Gate design/ dimension	Qty	Rate
1	Construction of proposed patient attendant complex toilet cum bathroom with other common facilities as per norm a/c map for Mahavir Vatsalya Aspatal Let Ghat Patna. Renovating area 23'x24' as per deluxe mode.	Ladies Patient attendant complex toilet bathroom&other	Wc 5 nos shower 3nos washtop 4nos	
		Gents Patient attendant complex toilet bathroom& other	Wc 5 nos shower 3nos wash top 3nos Urinals 4nos	

Note:- As per previous constructed area (existed) proper standard design. and BOQ attached

(Handwritten signature)
29/01/26

(M.P.Sinha)
Deputy Director
Mahavir Vaatsalya Aspatal

(Handwritten signature)
29.01.26

(Dr. Lakhindra Prasad)
Additional Director
MahavirVaatsalya Aspatal

(Handwritten signature)
29/1/26

(Dr.(Prof) Rajiv Ranjan Prasad)
Director
MahavirVaatsalya Aspatal

(Handwritten signature)
29/1/2026



BOQ.

TOTAL WORK ESTIMATE WORK- BOQ


S. No.	Work Particular Name	Unit	Qty
1	Old 10" Brick wall Demolishing	SFT	426
2	Old Damage Toilet Floor Area	SFT	281
3	Total Damage/Choked Pan Set	Nos	6
4	Total Old Breakage Toilet Quarry	Nos	8
5	Total Dismantling of Old Check Pan	Nos	2
6	Total Water Source Pipelining and Connection Angle cock and Bib cock & Flush tank set	-nos	18
8	Total Wash top Basin Uninstalling	Nos	4
9	Total PCC Concrete Casting Demolishing Area	SFT	281
10	Total Breakage Malba Loading & Shifting	CFT	395
11	Total Breakage Malba Floor Area	CFT	117
12	Total New Layout Complete Toilet/Bathroom	SFT	281
13	Total Soil Excavation Work	Cum	5.86
14	New Chamber Nala Pit Construction Work	Nos	3
15	New Point of Water Source Line	Nos	20
15 A	New sewerage line laying and fitting	Ls	total
16	New Renovate Extension Roof Shed with complete material work	SFT	362
17	Total Men Toilet Construction	Nos	5
18	Total Women Toilet Construction	Nos	5
19	Total Men Shower Room Construction	Nos	3
20	Total Women Shower Room Construction	Nos	2

[Signature]
20/11/2026

[Signature]
126


TOTAL WORK ESTIMATE WORK- BOQ

21	Total Wash top Basin Area for Men	Nos	3
22	Total Wash top Basin Area for Women	Nos	4
23	Total Urinal Point Set	Nos	4
24	Total RCC Construction Volume	CFT	71
25	Total New Wall Brickwork 10" Area	SFT	2886+120
26	Total New Wall Plaster Work	SFT	6012
27	Total New Renovated PCC Casting Work	SFT	584
28	Total New Tiles Floor Work	SFT	462
29	Total New Wall Tiles Area	SFT	552
30	Total soil sand filling work	CFT	480
31	Total Require Cement	Bags	121
31a	New brick flat soling work	sft	231
33	Total Require Sone Sand	CFT	1477
34	Total Require Stone Chips	CFT	232
35	Total Require Saria 12mm	Pcs	8
35	Total Require Saria 8mm	Pcs	10
36	Total Require Binding Wire	Kg	1
37	Tile Total require for Wall + Floor	SFT	1014
38	Total Granite Work Area	SFT	34
39	Paint White Wash Area / Paint	SFT	400
40	Painting wash cement beg req brush and roller	beg	2
41	Basin hanging and fitting work charge.	nos	7 nos


 20/01/26

PROPOSE COMPLEX BATHROOM
LAYOUT PLAN

MAHAVIR VAATSALYA ASPATAL

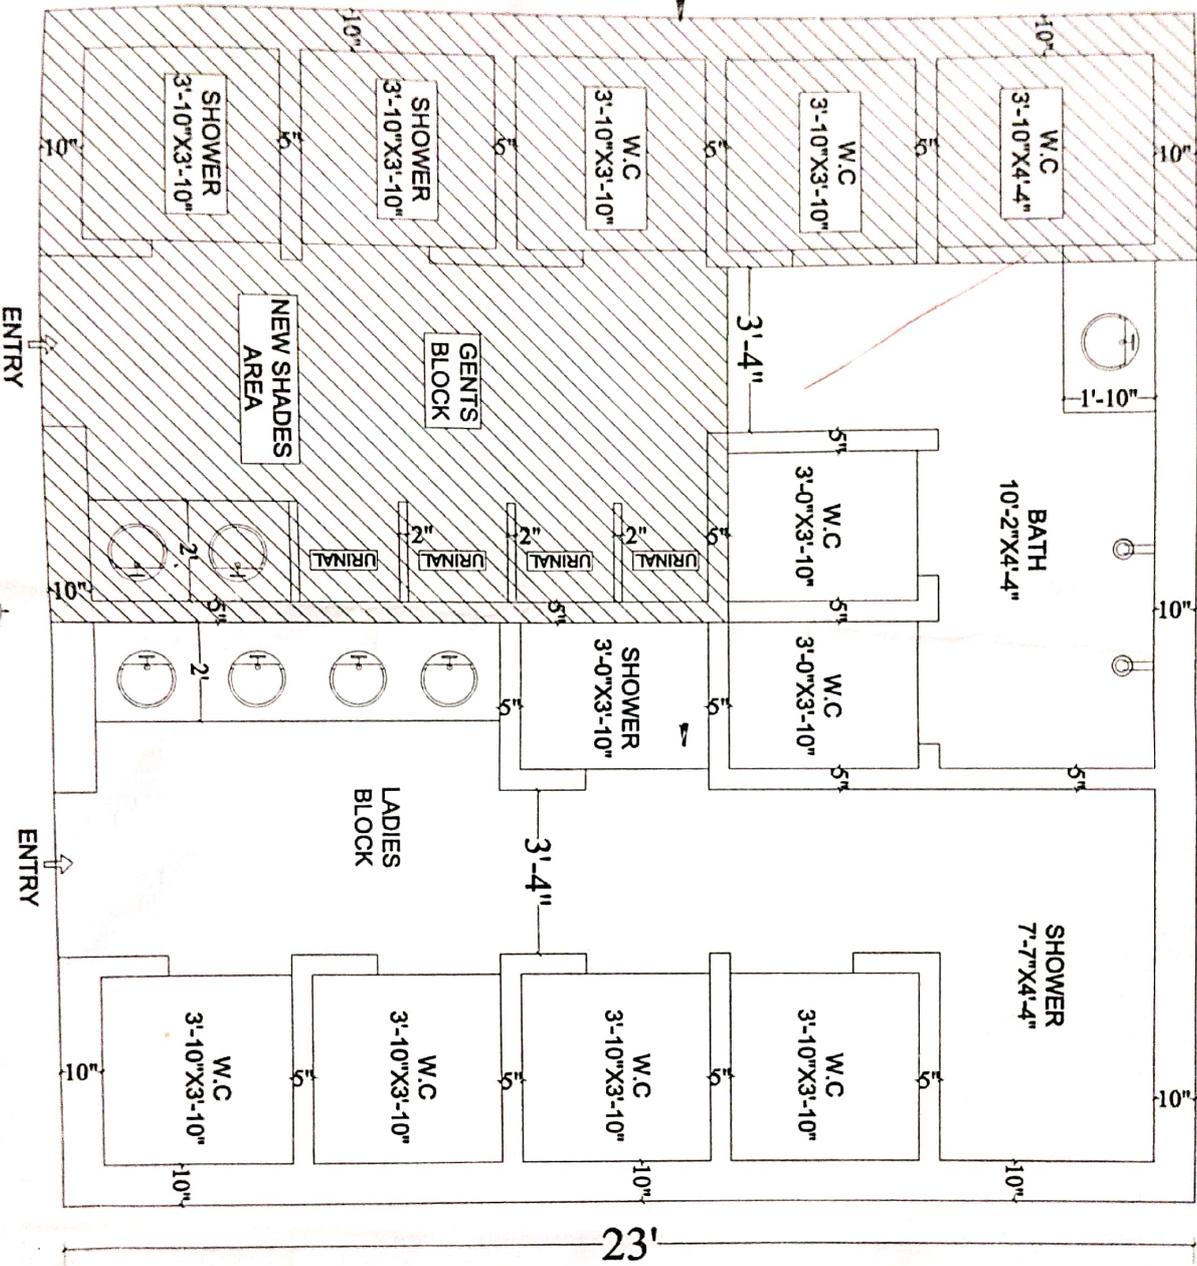

OTHER PLOT
24'

OTHER
PLOT

Handwritten signature and date: 12/1/2016